

Used for centuries as a tool to both teach and communicate mathematics, the abacus was found in one form or another across the ancient world. At Terzani, we saw the beauty in the abacus' mathematical purity and clean, functional design.


Abacus, multiplying luminescence.

In the hands of Terzani's craftsmen, we've turned this inspiration into a new collection of modular pendant lamps whose flexibility allows for complex and beautiful configurations. Each module, or strand, of Abacus is made of a custom set of round, hand-blown opal glass that emits a soft and uniform light. And, as the original abacus was used to calculate everything from simple addition to complex formulas, we've retained the same scalability. Due to its customization, our Abacus light is just as suitable in a home as in a commercial space, and its almost infinite configurations ensure you always find the right solution. Design Draw.








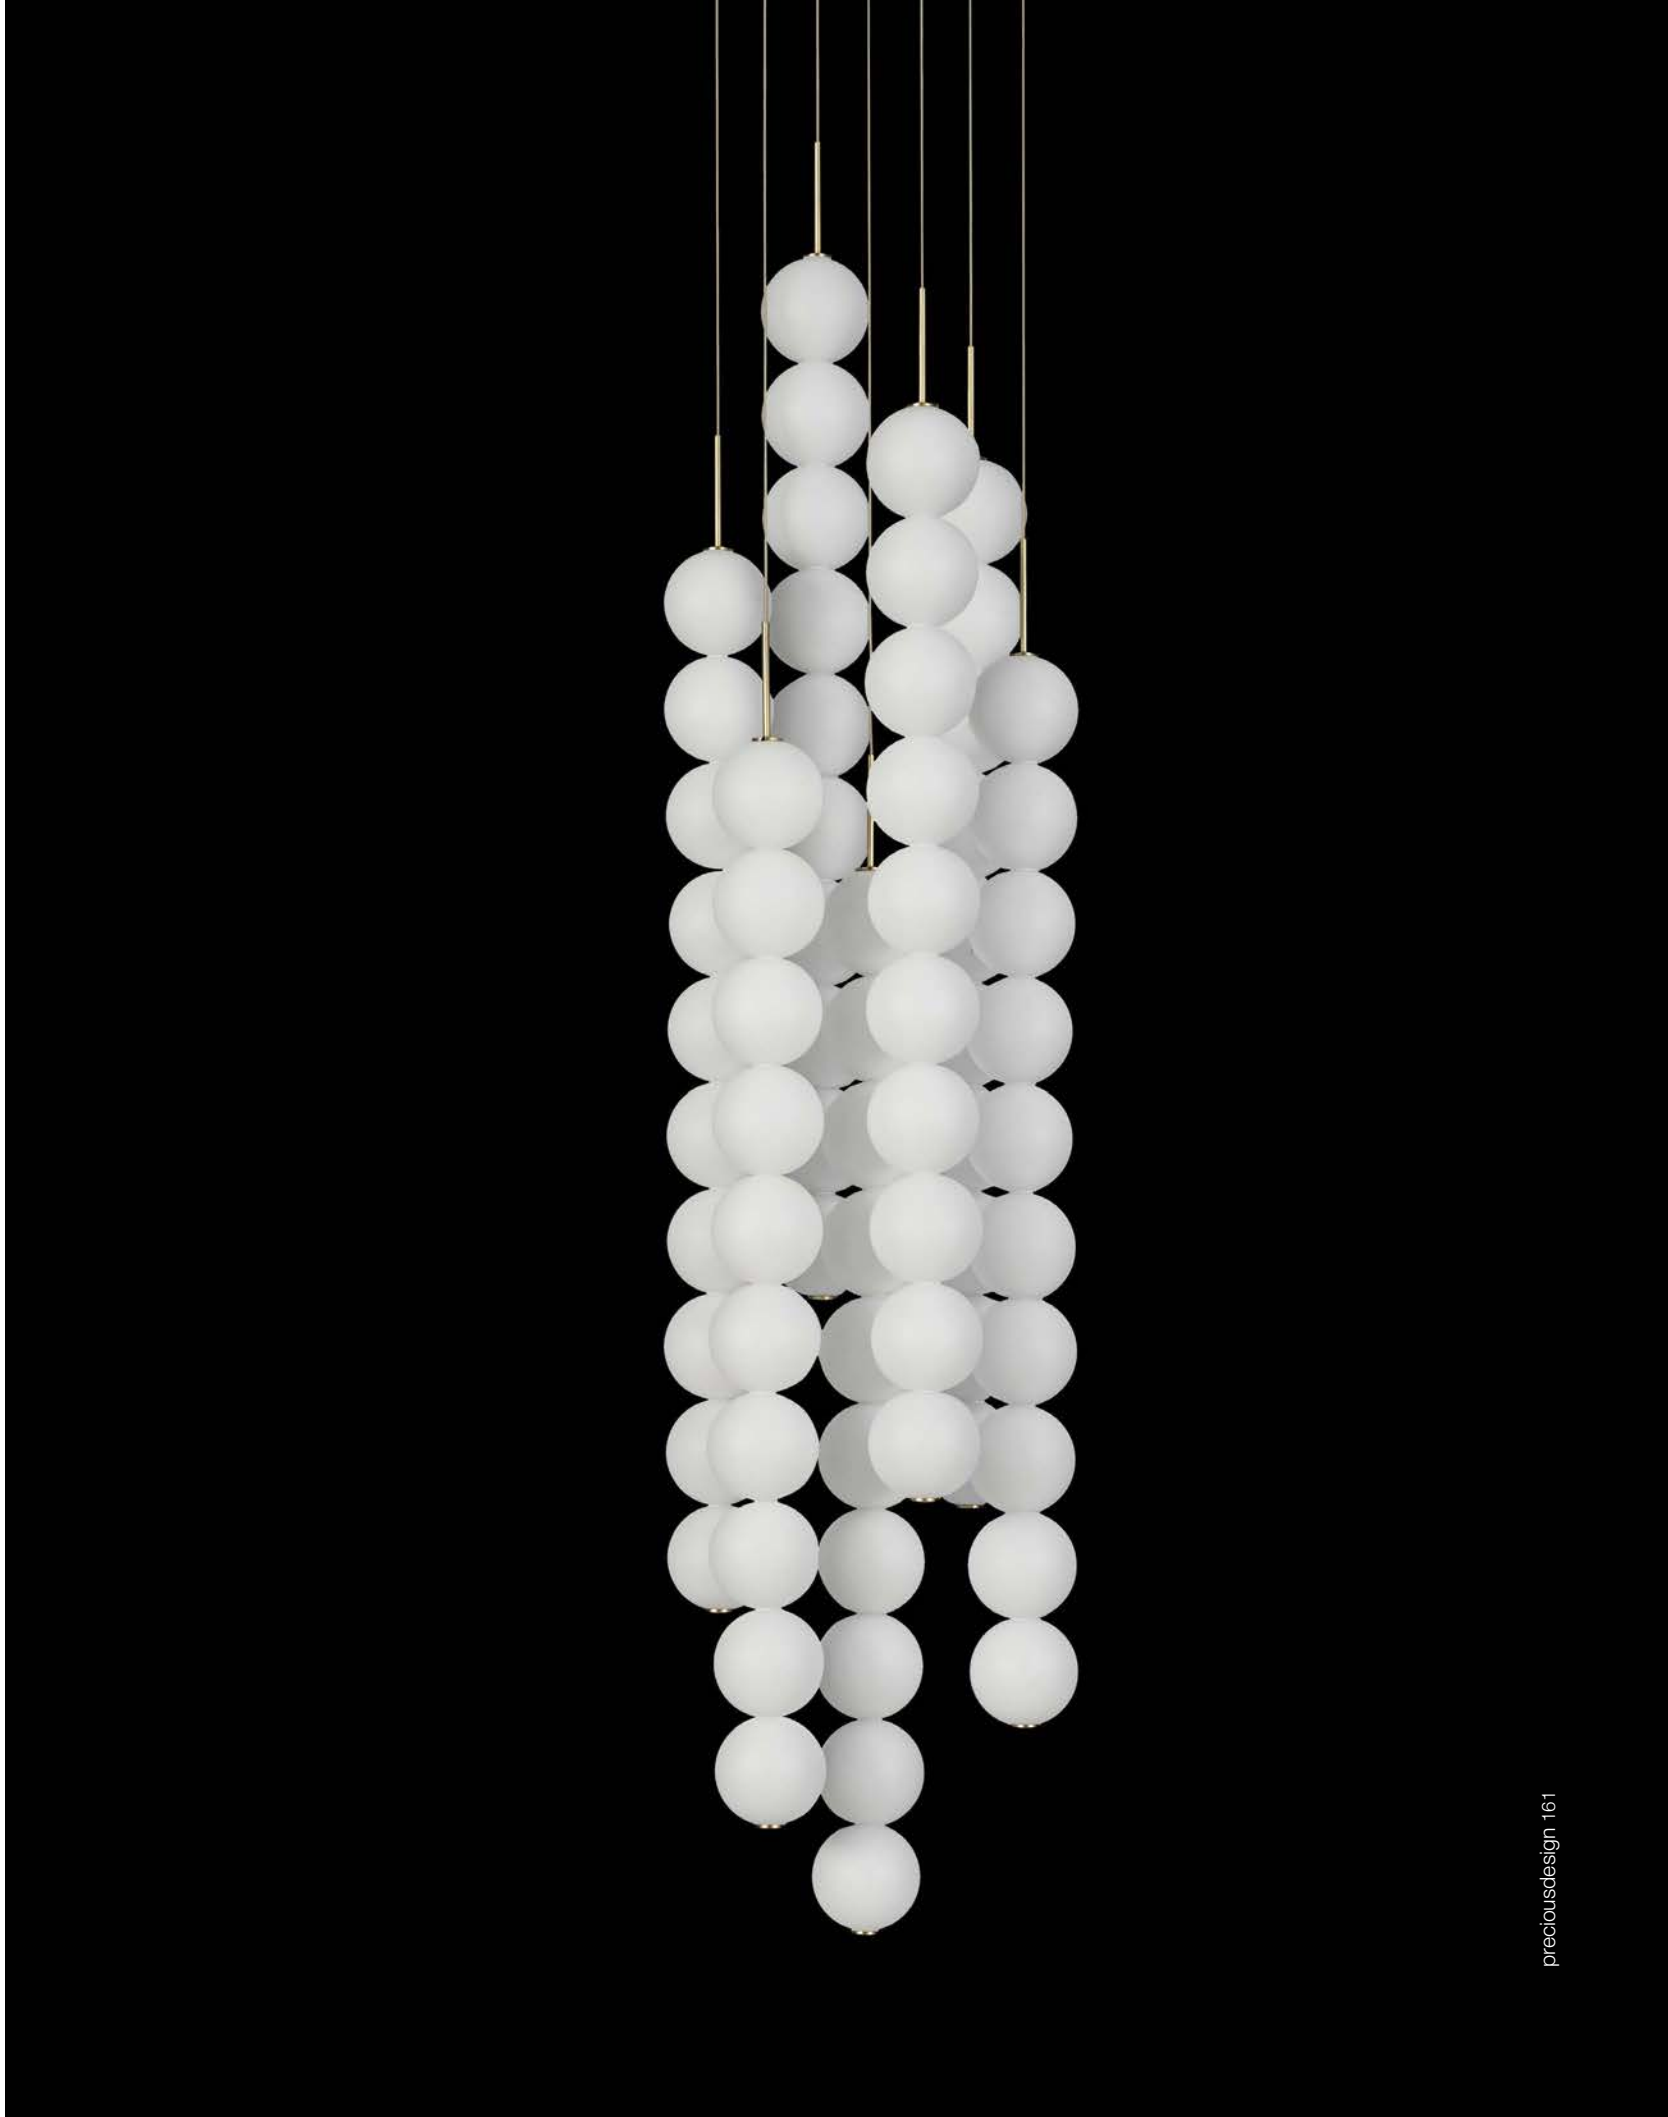





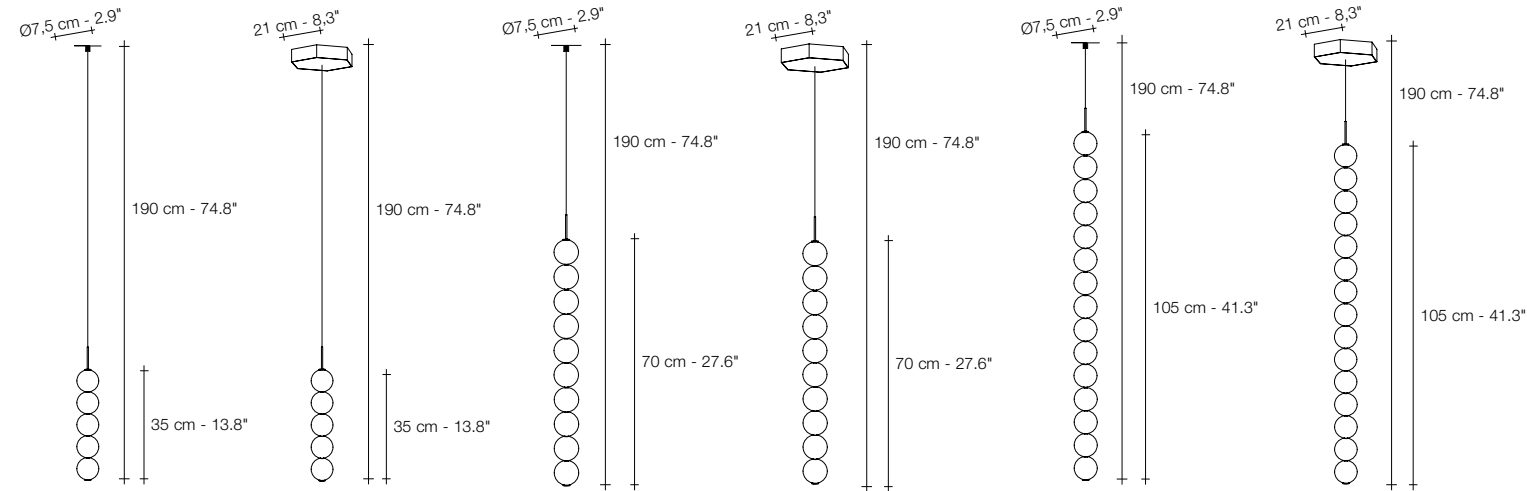

Ø7 cm - 2.9"

V01S 15KK
5 spheres
WHITE DISC

Ø7 cm - 2.8"

V01S P15
5 spheres

Ø7 cm - 2.8"

V01S 1AKK
10 spheres
WHITE DISC

Ø7 cm - 2.8"


V01S P1A
10 spheres

Ø7 cm - 2.8"

V01S 1FKK
15 spheres
WHITE DISC

Ø7 cm - 2.8"

V01S P1F
15 spheres

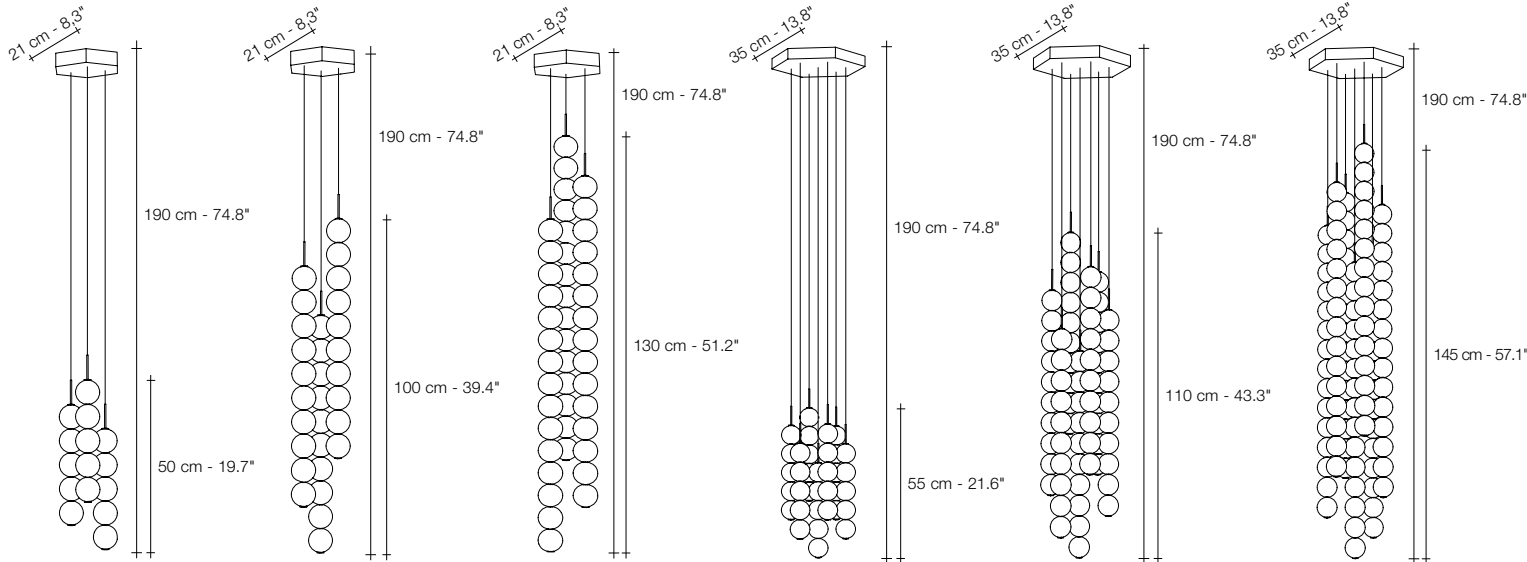

Ø20 cm - 7.9"

V03S P1F
3x5 spheres

Ø20 cm - 7.9"

V03S P1V
3x10 spheres

Ø20 cm - 7.9"

V03S P2B
3x15 spheres

Ø30 cm - 11.8"

V07S P21
7x5 spheres

Ø30 cm - 11.8"

V07S P32
7x10 spheres

Ø30 cm - 11.8"


V07S P43
7x15 spheres



BRASS |
WHITE GLASS

	LIGHT SOURCE	V01S 15KK	V01S P15	V01S 1AKK	V01S P1A	V01S 1FKK	V01S P1F	V03S P1F	V03S P1V	V03S P2B	V07S P21	V07S P32	V07S P43
230V	Replaceable LED module 3000K	3,6W 540 lm	3,6W 540 lm	7,2W 1080 lm	7,2W 1080 lm	10,8W 1620 lm	10,8W 1620 lm	3x3,6W 1620 lm	3x7,2W 3240 lm	3x10,8W 4860 lm	7x3,6W 3780 lm	7x7,2W 7560 lm	7x10,8W 11340 lm
	Dimmable	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI
120V	Replaceable LED module 3000K	3,6W 540 lm	3,6W 540 lm	7,2W 1080 lm	7,2W 1080 lm	10,8W 1620 lm	10,8W 1620 lm	3x3,6W 1620 lm	3x7,2W 3240 lm	3x10,8W 4860 lm	7x3,6W 3780 lm	7x7,2W 7560 lm	7x10,8W 11340 lm
	Dimmable	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	0-10V PWM	1-10V PWM	1-10V PWM	1-10V PWM

Different dimming options on request

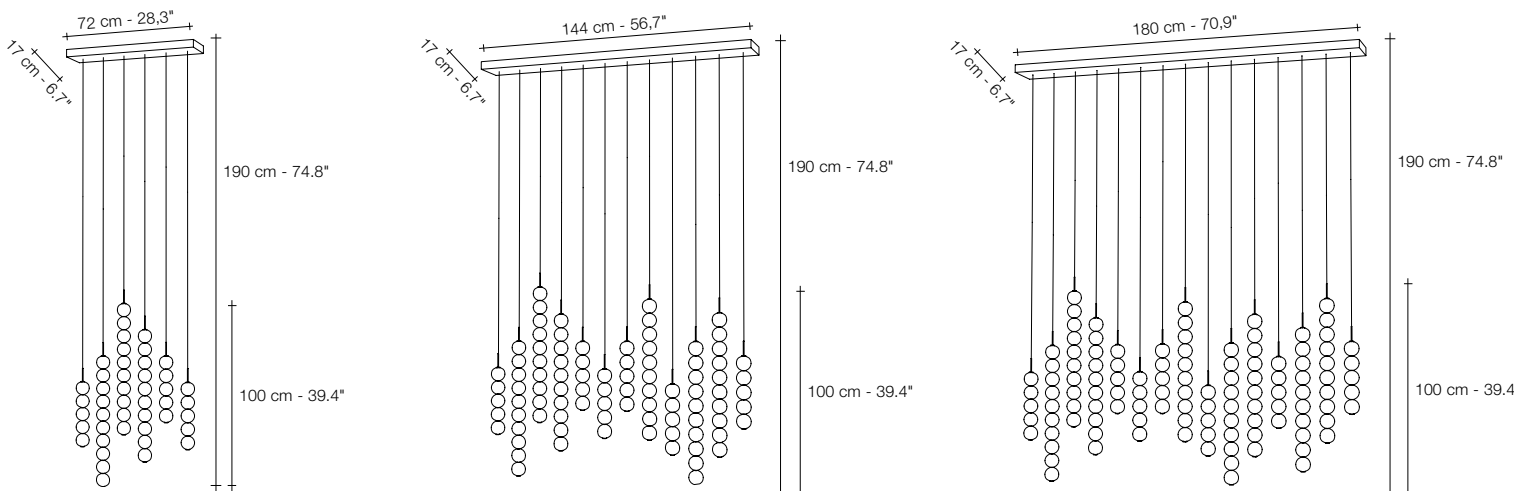

70 cm - 27.6"


V06S R2B
3x5 - 3x10 spheres

140 cm - 55.1"

V12S R3M
6x5 - 6x10 spheres

175 cm - 68.9"

V15S R4D
7x5 - 8x10 spheres

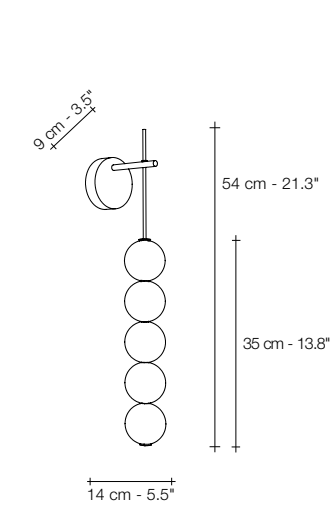

V01A 15
5 spheres

N/A in North America

	LIGHT SOURCE	V06S R2B	V12S R3M	V15S R4D	V01A 15
230V	Replaceable LED module 3000K	3x3,6W 3x7,2W 4860 lm	6x3,6W 6x7,2W 9720 lm	7x3,6W 8x7,2W 12420 lm	3,6W 540 lm
	Dimmable	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V 100KQ PUSH DALI	0/1-10V PUSH
120V	Replaceable LED module 3000K	3x3,6W 3x7,2W 4860 lm	6x3,6W 6x7,2W 9720 lm	7x3,6W 8x7,2W 12420 lm	-
	Dimmable	1-10V PWM	1-10V PWM	1-10V PWM	-

Different dimming options on request